



IS-STE SERIES


MODEL NO.	P	D	L	N	H	WEIGHT
IS-STE-5	5	10	36	3	30	45
IS-STE-6	6	12	40	3	34	70
IS-STE-8	8	14	53	3.5	46	105
IS-STE-10	10	16	65	3.5	58	160
IS-STE-12	12	18	77	3.5	58	160
IS-STE-14	14	20	89	3.5	82	340
IS-STE-16	16	22	101	3.5	94	440
IS-STE-18	18	24	113	3.5	94	440
IS-STE-20	20	26	128	4.5	119	700
IS-STE-22	22	28	140	4.5	131	820
IS-STE-24	24	30	152	4.5	143	1070
IS-STE-30	30	36	189	4.5	180	1,940

The IS-STE series is a straight-through silencer providing an economical solution for applications that do not require a high degree of noise attenuation. When compared to the **IS-STP** series, the design is similar with reduced attenuation due to the relative low length to diameter ratio.

SPECIFICATIONS:

- SILENCER TYPE:** Straight-through
- CONNECTION:** Threaded / Flanged
- MATERIAL:** Mild Steel
- FINISH:** Primer coated exterior
- HEAT TOLERANCE:** 325°F -
(at standard paint & acoustical package)


All dimensions shown in inches, weight in pounds.

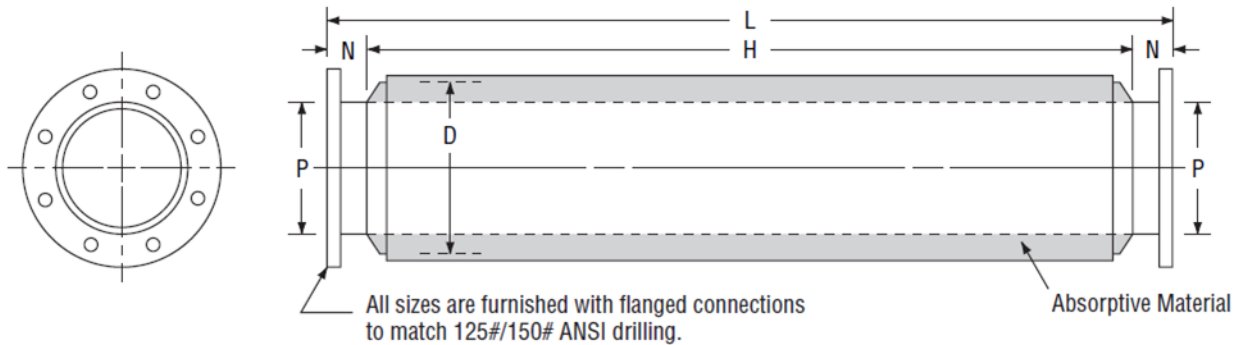

TYPICAL APPLICATIONS:

- Centrifugal Blowers - inlet or discharge
- Rotary Positive Blower inlet - intermediate sized
- Vacuum Pump discharge - intermediate sized
- Centrifugal Compressors - high pressure inlet
- Gas Turbine inlet
- Any high frequency noise source

Typical Attenuation Curve

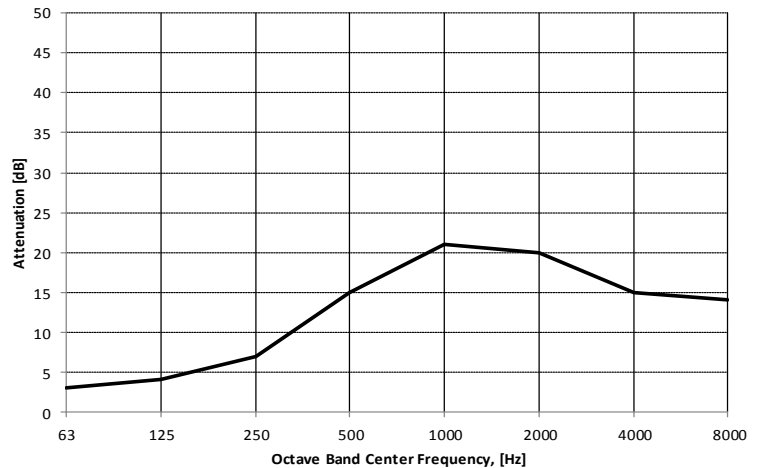

PROJECT: _____

ENGINEER: _____

LOCATION: _____

CONTRACTOR: _____

REVISIONS: _____

